

COPPER

We are engaged in offering LAN UTP products that are precision engineered
Manufactured using superior quality material our products are highly durable and known for their quality
Moreover, we offer our range of UTP cables in different specifications

Copper Patch Cord

For more information:

www.le-nora.com
info@le-nora.com



COPPER

We are engaged in offering LAN UTP products that are precision engineered. Manufactured using superior quality material our products are highly durable and known for their quality. Moreover, we offer our range of UTP cables in different specifications.

For more information:

www.le-nora.com
info@le-nora.com


Patch Cords

Over View

All Lenora patch cords are components of a category-rated network infrastructure solution that also includes connectors and patch panels. These patch cords provide physical mated connections between components in 10BASE-T, 100BASE-T, & 155Mbps ATM networks. Clearfield offers Category 5e & 6 & 6A copper patch cords with UTP cable and 8-conductor connectors manufactured to EIA/TIA standards.

Description

Lenora Innovation Giga Stream Cat 6 patch cords are manufactured using high quality unshielded four pair Category 6 stranded cable. Available in a range of colors and lengths, UTP Category 6 patch cords are pre-terminated with RJ45 plugs and feature cable strain relief boots with a plug latch protection cap.

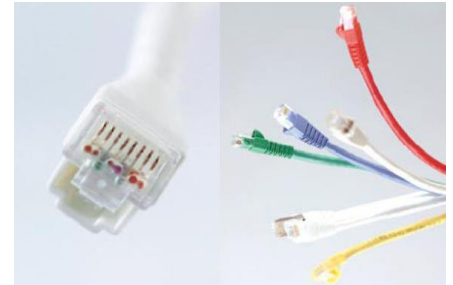

Features

- Patch Cords are used in the work area and cross-connect generic cabling applications
- Comprise a length of eight-wire flexible patch cable, terminated with two eight position
- RJ-45 plugs at each end
- Patch cords feature molded RJ-45 connectors for enhanced life and reliability
- Conforms to the ANSI/TIA/EIA-568-B.2-1, ISO/IEC 11801 2nd edition (2002) and
- CENELEC EN50173 (2002) for Category 6/Class E
- 100% tested at the factory



COPPER

We are engaged in offering LAN UTP products that are precision engineered. Manufactured using superior quality material our products are highly durable and known for their quality. Moreover, we offer our range of UTP cables in different specifications.

For more information:

www.le-nora.com
info@le-nora.com

General Specifications

Flammability Test	IEC 332-1 / UL 1581 VW-1
Weight	38 kg/km, nominal
Operating temperature	-20°C a 60°C
Performance category	CAT 5E, CAT 6 , CAT 6a
Patch cord types	UTP , FTP ,STP

ELECTRICAL:

Current Rating	1.5 Amps
Insulation Resistance	500 Mega-ohm min.
Dielectric Strength	1000 VAC (RMS)
Voltage	30 VAC max

Modular Plug Construction

Plug Housing	PC Resin UL-94V0
Contacts	High grade copper alloy
Plating	50 micro inch (1.27 micrometer) gold